

C2838R | 碳刷 Graphite Brush


应用领域：汽车产品、吸奶器、电动工具等。

Applications: automotive products, breast pumps, electric tools, etc.

主要技术指标 | Characteristics

			41-0007	41-0010	41-0019	
1	电压	Voltage	V	9.0	7.2	24.0
2	空载转速	No-load speed	rpm	13200	15000	8800
3	空载电流	No-load current	mA	250	450	70
4	堵转转矩	Stall torque	mNm	55	57.0	60.0
5	堵转电流	Stall current	mA	8170	13820	1903
6	负载转矩	Load torque	mNm	8.33	8.82	8.82
7	负载转速	Load speed	rpm	11200	12700	7480
8	负载电流	Load current	mA	1450	2500	345
9	最大输出功率	Max. output power	W	19.03	22.41	13.84
10	最大效率	Max. efficiency	%	75	64.6	85.3
11	转矩常数	Torque constant	mNm/A	6.94	4.26	32.73
12	转速 / 转矩斜率	Speed/torque gradient	rpm/mNm	240	263	147
13	压敏电阻	Varistor	Yes/No	Yes	No	No
14	重量	Weight	g	70	70	70
15	工作温度范围	Operating temperature range	°C	0~+60	0~+60	0~+60

特性曲线 | Characteristics Curve

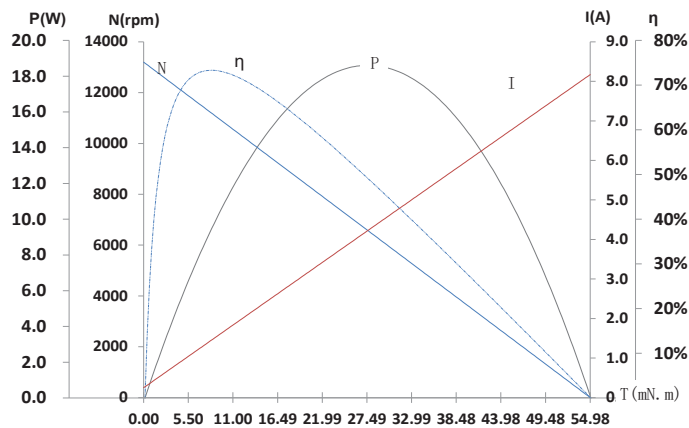

型号 / Model C2838R41-0007

可选参数 | Options

导线长度 Lead wires length
轴长 Shaft length
性能 Special coils
齿轮箱 Gearheads

外观图 | Outline Drawing

